




EVALUATIONS

SCALE: $\frac{1}{4}'' = 1'-0''$

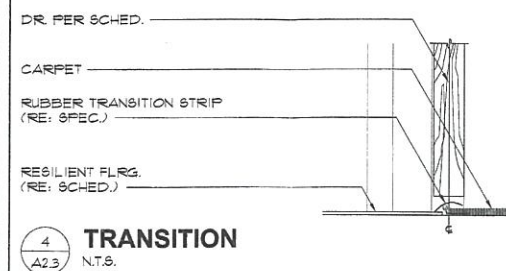

DOOR & FRAME SCHEDULE

[illegible]


DOOR & FRAME SCHEDULE NOTES

GENERAL NOTES:

- ALL SOLID CORE WOOD DOORS TO BE 1 3/4" THICK & STAIN-GRADE BIRCH UNLESS NOTED OTHERWISE.
- ALL DOORS LOCATED IN RATED ASSEMBLIES SHALL BE SELF-CLOSING, SELF-LATCHING WITH SMOKE GASKETS (SEE PLANS).
- ALL DOOR HARDWARE SHALL COMPLY WITH APPLICABLE CODES & SHALL HAVE 26D FINISH.
- ALL ROOM & DOOR SIGNAGE SHALL BE BY OWNER, G.C. TO COORDINATE WITH OWNER'S REPRESENTATIVE.
- ALL DOORS WITH ACoustICAL SEALS SHALL BE INSTALLED CONT. @ HEAD, JAMBS, & SILL, DO NOT CUT SEALS FOR ANY REASON & CAULK W/4M. FRAMES TIGHT TO GYP. BD. WALLS.
- ALL DOORS WITH ACoustICAL SEALS & PANIC BARS SHALL HOLD PANIC BAR FROM FRAME STOP TO ACCOMMODATE CONTINUOUS ACoustICAL SEALS.
- ALL DOORS WITH ACoustICAL SEALS, THE W/4M. FRAME JAMBS & HEAD SHALL BE PACKED WITH 2 1/2 PCF MINERAL WOOL INSULATION PRIOR TO W/4M. FRAME INSTALLATION.
- WOOD DOORS WITH ACoustICAL SEALS SHALL BE INSTALLED IN 1 3/4 GA. WELDED W/4M. FRAMES.
- WOOD DOORS WITH ACoustICAL SEALS SHALL BE SOLID CORE, 5-PLY MINIMUM WITH A FACE WEIGHT OF 5 PSF MINIMUM.


SPECIFIC NOTES PER DOOR (NOTED AS "X") UNDER REMARKS ON THE DOOR/FRAME SCHED.):

2. PROVIDE 1/2 PAIR HINGES PER DOOR
3. PROVIDE ONE CLOSER DEVICE
4. PROVIDE PANIC HARDWARE
5. PROVIDE 5.5" KICKPLATE AT PUSH SIDE OF DOOR
6. PUSH-PULL - NO LATCH
7. PROVIDE WEATHER STRIP KIT 4 SWEEPS
8. TWO SETS SMOKE GASKETS 4 MORTISED DOOR SEAL @ SILL
9. ASTRAGAL SEAL
10. SOLID ALUMINUM THRESHOLD (NO GROOVES)
11. PROVIDE ONE CLOSER DEVICE W/ STOP

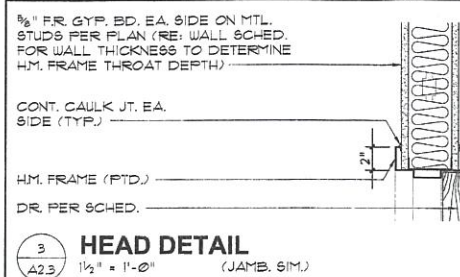

3 HEAD DETAIL

(JAMB. SIM.

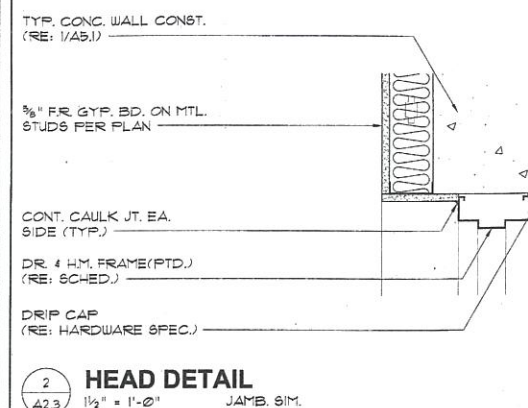


ROOM FINISH SCHEDULE

ROOM NO. AND NAME		FLOOR	BASE	WALLS	CEILING	REMARKS
		SHEET VANT. 1A" SHEET VANT. 1B" 12" x 12" PORC. TILE 1A" 18" x 18" PORC. TILE 1A" 18" x 18" PORC. TILE 1B" WALK-OFF MAT CARPET 1A" CARPET 1B" CARPET 1C" CARPET 1D" SEALED CONC. VCT. RUBBER TREADS + TILE LANDING	4" UT. RUBBER BASE 6" HT. PORC. COVE BASE 6" HT. WOOD BASE	GYP. BD. (PTD.) HI-ABUSE GYP. BD. (PTD.) GYP. BD. (EPOXY PTD.) PORC. WALL TILE DECOCOAT 2 x 4 LAT-N TILE 2 x 4 LAT-N TILE GYP. BD. (PTD.) EXPOSED STRUCTURE (PTD.)	CEILING HEIGHT	① PROVIDE 3 1/2" UNFACED BATT INSUL. ABOVE CLG. TILES
100	ENTRY				14'-0"	
101	TOILET				9'-0"	①
102	RECEPTION				9'-0"	
103	OFFICE				9'-0"	
104	OFFICE				9'-0"	
105	WOMEN'S				9'-0"	①
106	MEN'S				9'-0"	①
107	ELEC. / MECH. ROOM				STRUCT.	
107A	I.T. ROOM				STRUCT.	
108	STORAGE				STRUCT.	
109	STORAGE				STRUCT.	
110	CORRIDOR				9'-0"	
111	SERVERY				9'-0"	
111A	STORAGE				STRUCT.	
112	STORAGE				STRUCT.	
113	PLATFORM				STRUCT.	
114	STORAGE				STRUCT.	
117	CORRIDOR				12'-0"	
118	AUDITORIUM / WORSHIP CENTER				STRUCT.	CARPET + SOUND BOOTH ONLY
120	FELLOWSHIP FOYER				VARIED	
123	CAFÉ				VARIED	
124	MULTI-PURPOSE CLASSROOM				9'-0"	
125	CHILD MIN. STORAGE				9'-0"	
128	LIBRARY / COMPUTER ROOM				9'-0"	
129	NURSERY				9'-0"	
130	TOILET				9'-0"	①
131	MULTI-USE RESOURCE ROOM				9'-0"	
132	GIRL'S				9'-0"	①
133	BOY'S				9'-0"	①
134	TOILET				9'-0"	①
135	JANITOR'S CLOSET				STRUCT.	
136	CLASSROOM				9'-0"	
137	CLASSROOM				9'-0"	
138	TOILET				9'-0"	①
139	CLASSROOM				9'-0"	
140	CLASSROOM				9'-0"	
141	CLASSROOM				9'-0"	
142	CORRIDOR				9'-0"	
143	CLASSROOM				9'-0"	
144	CLASSROOM				9'-0"	
145	CLASSROOM				9'-0"	
146	CLASSROOM				9'-0"	
147	STORAGE				STRUCT.	
148	TOILET				9'-0"	①
149	CONFERENCE ROOM				9'-0"	
150	OFFICE				9'-0"	
151	OFFICE				9'-0"	
152	SICK ROOM				9'-0"	
153	STORAGE				STRUCT.	
154	RECEPTION				9'-0"	
155	ENTRY				9'-0"	

ROOM FINISH SCHEDULE NOTES

1. REFER TO SPECIFICATIONS FOR FINISH MATERIAL REQUIREMENTS & INSTALLATION.
2. REFER TO SHEET A2.1 FOR FIRE RATED ASSEMBLY REQUIREMENTS.
3. SEE INDEX SHEET FOR ADDITIONAL FINISH NOTES AND REQUIREMENTS.
4. ALL INTERIOR FINISH MATERIALS SHALL BE MINIMUM CLASS C RATED, PER IBC TABLE 803.5

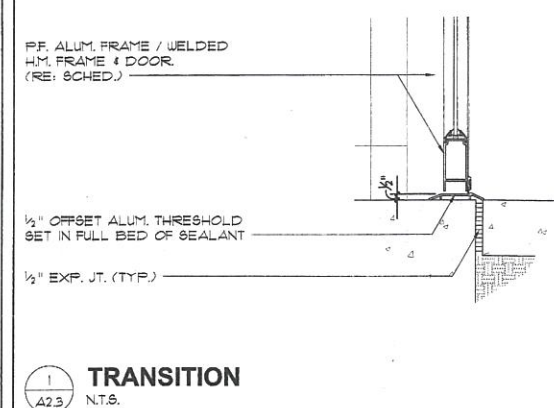 **TRANSITION**

NTS



MANTEL TETER ARCHITECTS
229 WALNUT STREET, SUITE 700 | KANSAS CITY, MISSOURI 64106
TOLL-FREE: 877.215.5600 | P: 816.931.5600 | F: 816.531.7537

Timothy Lutheran Church

Project Description:

PROJECT #: 08-543
ISSUE DATE: 10/20/2008
DRAWN BY: ARS
CHECKED BY: SKP

REVISIONS

1. _____
2. _____
3. _____
4. _____
5. _____

SHEET No.

A2.3

SCHEDULES & DOOR ELEVATIONS